DIN Locks

Type	Description/features
334	DIN sashlock according to DIN 18251-1, class 3 prepared for profile cylinder, with transmission bar, backset 55 (60) mm, centre distance 72 mm, 8 mm FIX follower, forend 20 x 235 mm for rebated doors or 24 x 235 mm for flush doors, square or radius, satin stainless steel, steel latch bolt and steel dead bolt, nickel-plated
390	DIN bathroom-lock according to DIN 18251-1, class 3 for toilet/bathroom use with 8 mm dead-bolt follower backset 55 (60) mm, centre distance 78 mm, 8 mm FIX follower, forend 20 x 235 mm for rebated doors or 24 x 235 mm for flush doors, square or radius, satin stainless steel, steel latch bolt and steel dead bolt (single-turn 15 mm), nickel-plated
334SL	DIN sashlock with bushed follower other features like article number 334
390SL	DIN bathroom-lock with bushed follower other features like article number 390

Special features	
Backset	65 mm
	70 mm
	80 mm
Special equipment	9 mm FIX follower
	Triple latch
	Noise reduction
	Extra lever key
Forend surfaces	Stainless steel, polished
	Brass, polished
	Other finishes
Striking plates	0400 – Angular striking plate for rebated doors, Satin stainless steel
	0522 – Flat striking plate for flush doors, Satin stainless steel
	Other designs

Art.No. 334

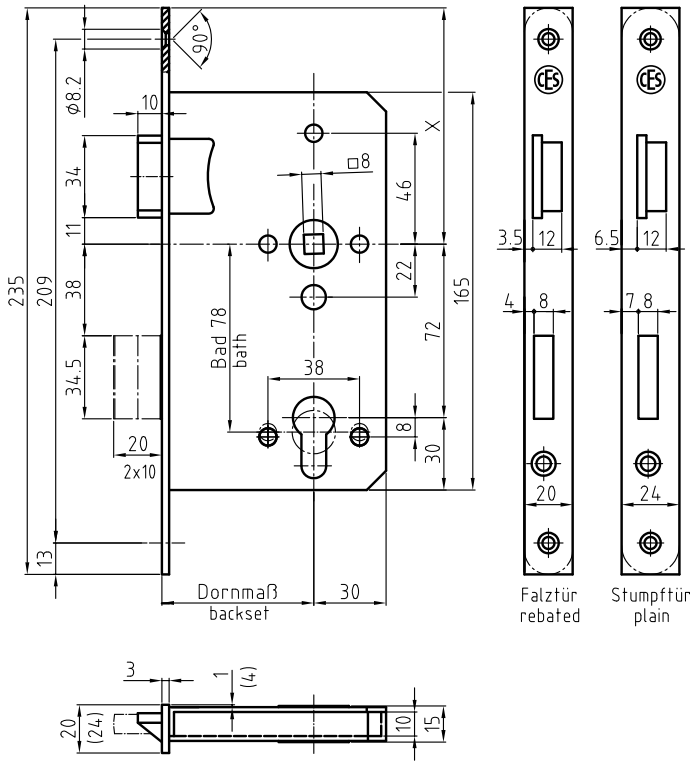

Subject to changes without notice